

FCZ P - PO

Fan coil unit for ducted installations

Cooling capacity 0,65 ÷ 7,62 kW
Heating capacity 1,45 ÷ 17,02 kW



- Very quiet
- Suitable for duct-type installations too
- Total comfort: reduced variations in temperature and relative humidity
- Vertical and horizontal installation



DESCRIPTION

fan coil can be installed in any 2/4 pipe system and operates with any heat generator even at low temperatures, and thanks to varied versions and settings, it is easy to pick the ideal solution for any need.

FEATURES

Ventilation group

Consisting of double suction centrifugal fans that are particularly silent, statically and dynamically balanced, and directly coupled with the motor shaft.

The motor is wired for single phase and has three speeds, with capacitor. The motor is fitted on sealed for life bearings and is secured on anti-vibration and self-lubricating mountings.

Extractable shrouds for easy, effective cleaning

Heat exchanger coil

With copper pipes and aluminium fins, the standard or oversized main coil and the possible secondary coil have female gas water connections on the left side and the manifolds have air vents.

The coil is not suitable for use in corrosive atmosphere or in environments where aluminium may be subject to corrosion.

Reversibility of the water connections during installation only for units with a standard or boosted main coil, or standard with BV accessory. Not reversible in all other configurations. In any case, units with the coil water connections on the right are available at the time of ordering.

Condensate drip

Provided standard in plastic and fixed to the interior structure; with external condensate discharge.

Air filter

Air filter class Coarse 25% for all versions easy to pull out and clean.


In the PPC version, air purification is guaranteed by the Cold Plasma purifier.

The purifier is able to reduce pollutants, decomposing their molecules using electrical charges, causing the water molecules in the air to split into positive and negative ions. These ions neutralise the molecules in

the gaseous pollutants, obtaining products normally present in clean air. The device is able to eliminate 90% of the bacteria. The result is clean, ionized air, free of foul odours.

VERSIONS

Flush-mounting and duct-type versions

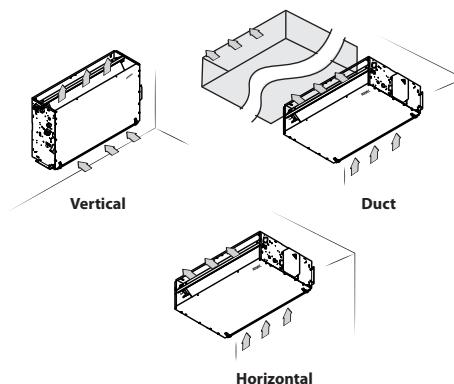

FCZ_P

— Flush-mounting

FCZ_PPC

— Flush-mounting with Cold Plasma purifier

FCZ_PO

— Flush-mounting, duct-type

— With useful head.

GUIDE TO SELECTING THE POSSIBLE CONFIGURATIONS

Field	Description
1,2,3	FCZ
4	Size 1, 2, 3, 4, 5, 6, 7, 8, 9, 10
5	Main coil 0 Standard 5 Oversized
6	Secondary coil 0 Without coil

Field	Description
1	Standard
2	Oversized
7	Version P Flush-mounting, without cabinet PO Flush-mounting, with boosted motor POR Flush-mounting, with boosted motor, with water connections on right-hand side PPC Flush-mounting with Cold Plasma purifier PR Flush-mounting, without cabinet, with water connections on right-hand side

SIZE AVAILABLE FOR VERSION

Size	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
Versions produced (by size)																				
Versions available (by size)	P,PR
Versions available (by size)	PO,POR	-	-	-	-
Versions available (by size)	PPC	.	-	-	.	.	-	.	.	-	-	.	.	-	-	.	-	-	.	.
Size	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
Versions produced (by size)	P,PR
Versions available (by size)	PO,POR	-	-	-	.	.	.	-	-	-	-	-
Versions available (by size)	PPC	.	-	-	.	.	-	.	.	-	-	.	.	-	-	.	-	-	-	-

ACCESSORIES

Control panels

AER503IR: Flush-mounting thermostat with backlit display, capacitive keypad and infrared receiver, for controlling both brushless fan coils and those with an asynchronous motor. In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, with air purifying devices (Cold Plasma and germicidal lamp), with radiant plate or with FCZ-D twin delivery (Dualjet). In addition, it can control systems with radiant panels or mixed (fan coil and radiant floor) systems. Being equipped with an infrared receiver, it can, in turn, be controlled by the VMF-IR remote control.

PRO503: Wall box for AER503IR and VMF-E4 thermostats.

PXAI: Thermostat on the machine for controlling the fan coils (both with asynchronous and brushless motors), complete with water and air probes to be positioned in the relative seats, and a plastic support to fix it on the side of the unit. In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, purifier devices (Cold Plasma and germicidal lamp), or radiant plate.

SA5: air probe kit (L = 15 m) with probe-locking cable grommet.

SW3: Water probe (L = 2.5 m) for controlling the minimum and maximum and to allow automatic seasonal switching for electronic thermostats fitted with water side changeover.

SW5: water probe kit (L = 15m) with probe-holder connection point, fixing clip and probe-holder from heat exchanger.

TX: Wall-mounting thermostat for controlling either brushless fan coils or those with asynchronous motors. In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, with air purifying devices, radiant plate or FCZ-D twin delivery (Dualjet).

WMT05: Electronic thermostat with thermostated ventilation.

WMT06: Electronic thermostat with continuous ventilation.

WMT10: Electronic thermostat, white, with thermostated or continuous ventilation.

VMF system

VMF-EOX: Thermostat to be secured to the side of the fan coil, fitted as standard with an air probe and a water probe.

VMF-E19: Thermostat to be secured to the side of the fan coil, fitted as standard with an air probe and a water probe.

VMF-E3: Wall mounted user interface, to be combined with accessories VMF-E19, VMF-E19I, VMF-EOX with grids GLF_N/M and GLL_N, can be controlled with VMF-IR control.

VMF-E4DX: Wall-mounted user interface. Grey front panel PANTONE 425C (METAL).

VMF-E4X: Wall-mounted user interface. Light grey front panel PANTONE COOL GRAY 1C.

VMF-IR: User interface compatible with the AER503IR thermostat and with all the grids of cassettes equipped with the infrared receiver compatible with the VMF system.

VMF-SW: Water temperature probe.

VMF-SW1: Extra water probe to be used for 4-pipe systems.

Water valves

VCZ_X: 3-way valve kit for single-coil fan coil, RH connections, for 4-pipe systems. With totally separate "heating" and "cooling" circuits. This kit consists of two 3-way insulated valves and four connections, complete with electrothermal actuators, insulating shells for the valves, and the relative hydraulic couplings. X4L version for fan coils with LH connections, and X4R for fan coils with RH connections. 230V~50Hz power supply.

VCZ: 3-way motorised valve kit. The kit consists of a valve with its insulating shell, an actuator and the relative pipe fittings. It can be installed on fan coils with both right and left connections.

VCF44 - 45 - for the secondary coil: The 3-way motorised valve kit for the secondary coil or an optional heat only coil. The kit consists of a valve with its insulating shell, actuator and relevant water fittings; it is suitable to be installed on the fan coils with right and left water connections.

VCZD: 2-way motorised valve kit. The kit consists of a valve, an actuator and the relative pipe fittings. It can be installed on fan coils with both right and left connections.

VJP: Control and balancing combination valve for 2 and 4 pipe systems to install outside the unit, supplied without fittings and hydraulic components. The valve, which can guarantee a constant water flow rate in the terminal, within its operating range.

(Heating only) additional coil

BV: Single row hot water heat exchanger.

RX: Armoured electric coil with safety thermostat.

PCR: Galvanised plate protection for the controls and the electrical element.

Installation accessories

AMP: Wall mounting kit

DSC: Condensate drainage device.

BC: Condensate drip.

BCZ: Condensate drip.

Ventilcassaforma: Galvanised sheet metal template. It makes it possible to obtain directly in the wall a space for housing the fan coil.

MZA: Cabinet housing with fixed fins.

MZU: Cabinet housing with adjustable fins.

GA: Intake grid with fixed louvers

GAF: Intake grid with filter and fixed louvers

GM: Flow grid with adjustable louvers.

PA: Intake plenum in galvanised sheet metal, complete with suction couplings for circular-section ducts.

PAF: Intake plenum providing recovery and delivery on the same side, for all installations where the machine needs to be positioned outside the air conditioned rooms to minimise the noise levels and facilitate maintenance.

PM: Delivery plenum with circular flanges. Sandwich structure in hot galvanised steel, with interposed polyurethane foam (40 kg/m³). The panel is 15 mm thick. It is installed in place of the delivery panel with a rectangular flange, using the same 4 self-threading screws.

RD: Straight delivery coupling for canalisation.

RDA: Straight suction coupling for canalisation.

RP: 90° delivery coupling.

RPA: 90° suction coupling.

Accessories for ducting

MZC: Plenum with motorised dampers.

RDA_V: Straight intake connection with rectangular flange.

RPA_V: Suction plenum with rectangular flange; both sides have a circular push-out Ø 150mm that can be removed.

RDA_C: Straight intake connection with circular flanges.

PA_V: Suction plenum with circular plastic flanges; both sides have a circular push-out Ø 150mm that can be removed.

PM_V: Internally insulated delivery plenum with circular flanges; both sides have a circular push-out Ø 150mm that can be removed.

RPM_V: Internally insulated delivery plenum with rectangular flange; both sides have a circular push-out Ø 150mm that can be removed.

RDM_V: Straight delivery coupling in galvanised sheet metal.

RDM_C: Straight discharge internally insulated, with circular flanges.

ACCESSORIES COMPATIBILITY

Control panels

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
AER503IR (1)	PPR
	PO,POR																				
	PPC
PRO503	PPR
	PO,POR																				
	PPC
PXAI	PPR
	PO,POR																				
	PPC
SA5 (2)	PPR
	PO,POR																				
	PPC
SW3 (2)	PPR
	PO,POR																				
	PPC
SW5 (2)	PPR
	PO,POR																				
	PPC
TX (1)	PPR
	PO,POR																				
	PPC
WMT05	PPR
	PO,POR																				
	PPC
WMT06	PPR
	PO,POR																				
	PPC
WMT10	PPR
	PO,POR																				
	PPC

Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001
AER503IR (1)	PPR
	PO,POR
	PPC
PRO503	PPR
	PO,POR
	PPC
PXAI	PPR
	PO,POR
	PPC
SA5 (2)	PPR
	PO,POR
	PPC
SW3 (2)	PPR
	PO,POR
	PPC
SW5 (2)	PPR
	PO,POR
	PPC
TX (1)	PPR
	PO,POR
	PPC
WMT05	PPR
	PO,POR
	PPC
WMT06	PPR
	PO,POR
	PPC
WMT10	PPR
	PO,POR
	PPC

(1) Wall-mounting. If the unit intake exceeds 0.7A, or several units need to be managed with a single thermostat, board SIT3 and/or SIT5 is required.

(2) Probe for AER503IR-TX thermostats, if fitted.

VMF system

For more information about VMF system, refer to the dedicated documentation.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
VMF-E0X (1)	PPR	
	PO,POR	
	PPC	
VMF-E19	PPR	
	PO,POR	
	PPC	
VMF-E3	PPR	
	PO,POR	
	PPC	
VMF-E4DX	PPR	
	PO,POR	
	PPC	
VMF-E4X	PPR	
	PO,POR	
	PPC	
VMF-IR	PPR	
	PO,POR	
	PPC	
VMF-SW	PPR	
	PO,POR	
	PPC	
VMF-SW1	PPR	
	PO,POR	
	PPC	

Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001
VMF-E0X (1)	PPR
	P0,POR
	PPC
VMF-E19	PPR
	P0,POR
	PPC
VMF-E3	PPR
	P0,POR
	PPC
VMF-E4DX	PPR
	P0,POR
	PPC
VMF-E4X	PPR
	P0,POR
	PPC
VMF-IR	PPR
	P0,POR
	PPC
VMF-SW	PPR
	P0,POR
	PPC
VMF-SW1	PPR
	P0,POR
	PPC

(1) Also the accessory VMF-SIT3V is mandatory if the unit exceeds 0.7 Amperes.

Water valves

3 way valve kit

	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	
Main coil	VCZ41	VCZ42															
	VCZ4124	VCZ4224															
Secondary coil	VCF44	VCF44	-	-	VCF44	VCF44	-	-	VCF44	VCF44	-	VCF44	VCF44	VCF44	VCF44	-	
	VCF4424	VCF4424	-	-	VCF4424	VCF4424	-	-	VCF4424	VCF4424	-	VCF4424	VCF4424	VCF4424	VCF4424	-	
Additional coil "BV"	VCF44	-	-	VCF44	-	-	-	VCF44	-	-	-	VCF44	-	-	-	-	
	VCF4424	-	-	VCF4424	-	-	-	VCF4424	-	-	-	VCF4424	-	-	-	-	
	500	501	502	550	600	601	602	650	700	701	702	750	800	801	802	850	
Main coil	VCZ42																
	VCZ4224																
Secondary coil	VCF44	VCF44	-	-	VCF44	VCF44	-	-	VCF44	VCF44	-	VCF44	VCF44	VCF44	VCF44	-	
	VCF4424	VCF4424	-	-	VCF4424	VCF4424	-	-	VCF4424	VCF4424	-	VCF4424	VCF4424	VCF4424	VCF4424	-	
Additional coil "BV"	VCF44	-	-	VCF44	-	-	-	VCF44	-	-	-	VCF44	-	-	-	-	
	VCF4424	-	-	VCF4424	-	-	-	VCF4424	-	-	-	VCF4424	-	-	-	-	
	900	901	950	1000	1001												
Main coil	VCZ43	VCZ43	VCZ43	VCZ43	VCZ43												
	VCZ4324	VCZ4324	VCZ4324	VCZ4324	VCZ4324												
Secondary coil	VCF45	-	-	VCF45	-	-	-	VCF45	-	-	-	VCF45	-	-	-	-	
	VCF4524	-	-	VCF4524	-	-	-	VCF4524	-	-	-	VCF4524	-	-	-	-	
Additional coil "BV"	VCF45	-	-	VCF45	-	-	-	VCF45	-	-	-	VCF45	-	-	-	-	
	VCF4524	-	-	VCF4524	-	-	-	VCF4524	-	-	-	VCF4524	-	-	-	-	

2 way valve kit

	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450
Main coil	VCZD1	VCZD2														
	VCZD124	VCZD224														
Secondary coil	-	VCFD4	VCFD4	-	-	VCFD4	VCFD4	-	-	VCFD4	VCFD4	-	VCFD4	VCFD4	-	VCFD4
	-	VCFD424	VCFD424	-	-	VCFD424	VCFD424	-	-	VCFD424	VCFD424	-	VCFD424	VCFD424	-	VCFD424
Additional coil "BV"	VCFD4	-	-	VCFD4	-	-	VCFD4	-	-	VCFD4	-	VCFD4	-	VCFD4	-	-
	VCFD424	-	-	VCFD424	-	-	VCFD424	-	-	VCFD424	-	VCFD424	-	VCFD424	-	-
	500	501	502	550	600	601	602	650	700	701	702	750	800	801	802	850
Main coil	VCZD2															
	VCZD224															
Secondary coil	-	VCFD4	VCFD4	-	VCFD4	VCFD4	VCFD4	VCFD4	-	VCFD4	VCFD4	-	VCFD4	VCFD4	-	VCFD4
	-	VCFD424	VCFD424	-	-	VCFD424	VCFD424	-	-	VCFD424	VCFD424	-	VCFD424	VCFD424	-	VCFD424
Additional coil "BV"	VCFD4	-	-	VCFD4	-	-	VCFD4	-	-	VCFD4	-	VCFD4	-	VCFD4	-	-
	VCFD424	-	-	VCFD424	-	-	VCFD424	-	-	VCFD424	-	VCFD424	-	VCFD424	-	-
	900	901	950	1000	1001											
Main coil	VCZD3	VCZD3	VCZD3	VCZD3	VCZD3											
	VCZD324	VCZD324	VCZD324	VCZD324	VCZD324											
Secondary coil	-	VCFD4	-	VCFD4	-	VCFD4	-									
	-	VCFD424	VCFD424	-	-	VCFD424	VCFD424	-	-	VCFD424	VCFD424	-	VCFD424	VCFD424	-	VCFD424
Additional coil "BV"	VCFD4	-	-	VCFD4	-	-	VCFD4	-	-	VCFD4	-	VCFD4	-	VCFD4	-	-
	VCFD424	-	-	VCFD424	-	-	VCFD424	-	-	VCFD424	-	VCFD424	-	VCFD424	-	-

Valve Kit for 4 pipe systems - Requires a thermostat with valve management

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
VCZ1X4L (1)	P,PPC,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,POR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VCZ1X4R (1)	P,PPC,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,POR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VCZ2X4L (1)	P,P,O,POR,PPC,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,P,O,POR,PPC,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
VCZ2X4L (1)	P,PPC,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,POR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VCZ2X4R (1)	P,PPC,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,POR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VCZ3X4L (1)	P,PPC,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,POR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VCZ3X4R (1)	P,PPC,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,POR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

(1) The valves can be combined with the units if there is a control panel for managing them.

Combined Adjustment and Balancing Valve Kit

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
VJP060 (1)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,POR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VJP060M (2)	PPC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VJP090 (1)	P,P,O,POR,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	PPC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VJP090M (2)	P,P,O,POR,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	PPC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
VJP090 (1)	P,P,O,POR,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	PPC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VJP090M (2)	P,P,O,POR,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	PPC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VJP150 (1)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,POR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VJP150M (2)	PPC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VJP150M (2)	P,O,POR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	PPC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

(1) 230V~50Hz

(2) 24V

(Heating only) additional coil

Heating only additional coil

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
BV117 (1)	P,PR	.																			
BV122 (1)	P,P,O,P,O,R,PR																				
BV132 (1)	P,P,O,P,O,R,PPC,PR																				
BV142 (1)	P,P,O,P,O,R,PPC,PR																				
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
BV162 (1)	P,PR																				
	P,O,P,O,R,PPC																				
BVZ800 (1)	P,PPC,PR	.																			
	P,O,P,O,R	.																			

(1) Not available for sizes with oversized main coil.

Electric coil - Requires a thermostat with heater management. Not available for sizes with an oversized main coil.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	
RX17 (1)	P,PR	.																	
RX22 (1)	P,P,O,P,O,PR																		
RX32 (1)	P,P,O,P,O,PPC,PR																		
RX42 (1)	P,P,O,P,O,PPC,PR																		
RX52 (1)	P,P,O,P,O,PPC,PR																		
Model	Ver	501	502	550	600	601	602	650	700	701	702	750	800	801	802	850	900	901	
RX62 (1)	P,P,O,P,O,PPC,PR																		
	P,PPC,PR																		
RXZ800 (1)	P,O,P,O,R	.																	
Model	Ver	950						1000						1001					
RX62 (1)	P,PR																		

(1) Requires a thermostat with heater management. Not available for sizes with an oversized main coil. The PCR1 or PCR2 appliance must also be provided depending on the unit.

Galvanised plate protection for the controls and the electrical element.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	
PCR1	P,P,O,P,O,PR	.																	
Model	Ver	501	502	550	600	601	602	650	700	701	702	750	800	801	802	850	900	901	
PCR1	P,P,O,P,O,PR																		
PCR2	P,P,O,P,O,PR																		
Model	Ver	950						1000						1001					
PCR2	P,P,O,P,O,PR																		

Installation accessories

Wall mounting kit

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
	P,PR
AMP20	P,O,P,O,R	
	PPC
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000				
	P,PR
AMPZ	P,O,P,O,R
	PPC

Condensate drip

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
	P,PR
BCZ4 (1)	P,O,P,O,R	
	PPC
	P
BCZ5 (2)	P,O,P,O,R	
	PPC
	PR

Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001
BCZ4 (1)	PPR
	P,O,POR
	PPC
BCZ5 (2)	PPR
	P,O,POR
	PPC
BCZ6 (2)	PPR
	P,O,POR
	PPC

(1) For vertical installation.

(2) For horizontal installation.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
BC8 (1)	PPR
	P,O,POR
	PPC
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
BC8 (1)	PPR
	P,O,POR
	PPC
BC9 (1)	PPR
	P,O,POR
	PPC

(1) For horizontal installation.

Condensate recirculation device

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
DSC4 (1)	PPR
	P,O,POR
	PPC
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
DSC4 (1)	PPR
	P,O,POR
	PPC

(1) DSC4 cannot be mounted if even just one of these accessories is also installed: AMP - AMPZ valve VCZ1-2-3-4 X4L/R and all the condensate collection trays.

Ventilcassaforma

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
CHF17	PPR
	PPC
	P,P,O,POR,PR
CHF22	PPC
	P,P,O,POR,PR
	PPC
CHF32	P,P,O,POR,PR
	PPC
	P,P,O,POR,PR
CHF42	PPC
	P,P,O,POR,PR
	PPC
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
CHF62	PPR
	P,O,POR
	PPC

Cabinet housing with fixed fins.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
MZA100	P,PPC,PR
MZA200	P,PPC,PR
MZA300	P,PPC,PR
MZA500	P,PPC,PR
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
MZA800	P,PPC,PR
MZA900	P,PPC,PR

Cabinet housing with adjustable fins.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
MZU100	P,PPC,PR
MZU200	P,PPC,PR
MZU300	P,PPC,PR
MZU500	P,PPC,PR
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
MZU800	P,PPC,PR
MZU900	P,PPC,PR

Wall mounting and duct type installation accessories

Lower intake grille

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
GA17	P,PR																
	PPC	.																			
GA22	P,P,O,P,O,R,PR															
	PPC				.				.												
GA32	P,P,O,P,O,R,PR																
	PPC							.				.									
GA42	P,P,O,P,O,R,PR							
	PPC							
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
GA62	P,PR
	P,O,P,O,R
	PPC

Intake grilles with fixed fins and filter

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
GAF17	P,PR																
	PPC	.																			
GAF22	P,P,O,P,O,R,PR															
	PPC				.				.												
GAF32	P,P,O,P,O,R,PR																
	PPC							.		.		.									
GAF42	P,P,O,P,O,R,PR							
	PPC							
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
GAF62	P,PR
	P,O,P,O,R
	PPC

Delivery grilles with adjustable fins

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
GM17	P,PR																
	PPC	.																			
GM22	P,P,O,P,O,R,PR															
	PPC				.				.												
GM32	P,P,O,P,O,R,PR																
	PPC							.		.		.									
GM42	P,P,O,P,O,R,PR							
	PPC							
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
GM62	P,PR
	P,O,P,O,R
	PPC

Intake plenum in sheet metal complete with connectors for circular channels

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
PA17	P,PR																
	PPC	.																			
PA22	P,P,O,P,O,R,PR															
	PPC				.				.												
PA32	P,P,O,P,O,R,PR																
	PPC							.		.		.									
PA42	P,P,O,P,O,R,PR							
	PPC						
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
PA62	P,PR
	P,O,P,O,R
	PPC

Intake plenum providing recovery and delivery on the same side

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
PA17F	P,PR	•	•	•	•																
	PPC	•																			
PA22F	P,P,O,P,O,R,PR					•	•	•	•												
	PPC																				
PA32F	P,P,O,P,O,R,PR									•	•	•	•								
	PPC									•											
PA42F	P,P,O,P,O,R,PR										•	•	•	•	•	•	•	•	•	•	•
	PPC										•	•	•	•	•	•	•	•	•	•	•
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
PA62F	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,P,O,R	•	•	•	•	•	•	•	•	•											
	PPC	•				•	•	•		•	•	•		•	•	•	•	•	•	•	•

Delivery plenum with circular flanges.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
PM17	P,PR	•	•	•	•																
	PPC	•																			
PM22	P,P,O,P,O,R,PR					•	•	•	•												
	PPC									•											
PM32	P,P,O,P,O,R,PR									•	•	•	•								
	PPC									•											
PM42	P,P,O,P,O,R,PR										•	•	•	•	•	•	•	•	•	•	•
	PPC										•	•	•	•	•	•	•	•	•	•	•
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
PM62	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,P,O,R	•	•	•	•	•	•	•	•	•											
	PPC	•				•	•	•		•	•	•		•	•	•	•	•	•	•	•

Straight delivery coupling

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
RD17	P,PR	•	•	•	•																
	PPC	•																			
RD22	P,P,O,P,O,R,PR					•	•	•	•												
	PPC									•											
RD32	P,P,O,P,O,R,PR									•	•	•	•								
	PPC									•											
RD42	P,P,O,P,O,R,PR										•	•	•	•	•	•	•	•	•	•	•
	PPC										•	•	•	•	•	•	•	•	•	•	•
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
RD62	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,P,O,R	•	•	•	•	•	•	•	•	•											
	PPC	•				•	•	•		•	•	•		•	•	•	•	•	•	•	•

Straight suction coupling

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
RDA22	P,P,O,P,O,R,PR				•	•	•	•	•												
	PPC					•															
RDA32	P,P,O,P,O,R,PR						•	•	•	•	•	•									
	PPC						•			•											
RDA42	P,P,O,P,O,R,PR									•	•	•	•	•	•	•	•	•	•	•	•
	PPC									•	•	•	•	•	•	•	•	•	•	•	•
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
RDA62	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	P,O,P,O,R	•	•	•	•	•	•	•	•	•											
	PPC	•				•	•	•		•	•	•		•	•	•	•	•	•	•	•

90° delivery coupling.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
RP17	P,PR	•	•	•	•																
	PPC	•																			
RP22	P,P,O,P,O,R,PR				•	•	•	•	•												
	PPC						•														
RP32	P,P,O,P,O,R,PR									•	•	•	•								
	PPC									•											
RP42	P,P,O,P,O,R,PR										•	•	•	•	•	•	•	•	•	•	•
	PPC										•	•	•	•	•	•	•	•	•	•	•

Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001
RP62	PPR
	PO,POR
	PPC

90° suction coupling.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
RPA22	P,P,POR,PR
	PPC
RPA32	P,P,POR,PR
	PPC
RPA42	P,P,POR,PR
	PPC
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
RPA62	P,P,POR
	PPC

Accessories for ducting

Plenum with motorised dampers.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
MZC220	PO,POR
MZC320	PO,POR
MZC330	PO,POR
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
MZC830	PO,POR

Straight intake connection with rectangular flange.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
RDA000V	PO,POR
RDA100V	PO,POR
RDA200V	PO,POR
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
RDA300V	PO,POR

Intake plenum with rectangular flange.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
RPA000V	PO,POR
RPA100V	PO,POR
RPA200V	PO,POR
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
RPA300V	PO,POR

Suction plenum with plastic circular flanges.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
PA000V	PO,POR
PA100V	PO,POR
PA200V	PO,POR
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
PA300V	PO,POR

Internally insulated delivery plenum with circular flanges.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
PM000V	PO,POR
PM100V	PO,POR
PM200V	PO,POR
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
PM300V	PO,POR

Internally insulated delivery plenum with rectangular flange.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
RPM000V	PO,POR
RPM100V	PO,POR
RPM200V	PO,POR
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
RPM300V	PO,POR

Straight delivery coupling in galvanised sheet metal.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
RDM000V	PO,POR																
RDM100V	PO,POR																
RDM200V	PO,POR												
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
RDM300V	PO,POR	

Straight discharge internally insulated, with circular flanges.

Model	Ver	100	101	102	150	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550
RDMC000V	PO,POR																
RDMC100V	PO,POR																
RDMC200V	PO,POR												
Model	Ver	600	601	602	650	700	701	702	750	800	801	802	850	900	901	950	1000	1001			
RDMC300V	PO,POR	

PERFORMANCE DATA FOR UNITS WITHOUT HEAD (EUROVENT CERTIFICATE FC-H)

2-pipe

	FCZ100P			FCZ150P			FCZ200P			FCZ250P			FCZ300P			FCZ350P			FCZ400P			FCZ450P			FCZ500P			FCZ550P			
	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	
	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	
Heating performance 70 °C / 60 °C (1)																															
Heating capacity	kW	1,45	2,00	2,40	1,55	2,19	2,65	2,02	2,95	3,70	2,20	3,18	4,05	3,47	4,46	5,50	3,77	4,92	6,15	4,32	5,74	7,15	4,57	6,29	7,82	5,27	7,31	8,50	5,82	8,34	9,75
Water flow rate system side	l/h	125	172	206	136	192	232	177	258	324	193	278	355	304	391	482	330	431	539	379	503	627	400	551	685	462	641	745	510	731	855
Pressure drop system side	kPa	4,0	7,0	9,0	5,0	9,0	12,0	6,0	12,0	18,0	7,0	15,0	23,0	7,0	12,0	18,0	8,0	14,0	20,0	9,0	16,0	24,0	6,0	11,0	16,0	12,0	21,0	28,0	10,0	20,0	26,0
Heating performance 45 °C / 40 °C (2)																															
Heating capacity	kW	0,72	0,99	1,19	0,77	1,09	1,31	1,00	1,46	1,84	1,09	1,58	2,01	1,72	2,21	2,73	1,87	2,44	3,06	2,14	2,85	3,55	2,27	3,12	3,88	2,62	3,63	4,22	2,89	4,14	4,85
Water flow rate system side	l/h	126	173	207	134	189	229	174	254	319	190	274	350	299	385	475	325	425	531	373	495	617	394	543	675	455	631	734	502	720	842
Pressure drop system side	kPa	4,0	7,0	10,0	5,0	9,0	12,0	6,0	12,0	18,0	8,0	15,0	22,0	8,0	12,0	18,0	8,0	14,0	20,0	10,0	16,0	24,0	6,0	11,0	16,0	12,0	21,0	28,0	10,0	20,0	26,0
Cooling performance 7 °C / 12 °C (3)																															
Cooling capacity	kW	0,65	0,84	1,00	0,65	0,84	1,00	0,89	1,28	1,60	1,06	1,55	1,94	1,68	2,17	2,65	1,89	2,46	3,02	2,20	2,92	3,60	2,41	3,21	4,03	2,68	3,69	4,25	2,91	4,13	4,79
Sensible cooling capacity	kW	0,51	0,69	0,83	0,51	0,69	0,83	0,71	1,05	1,33	0,79	1,20	1,52	1,26	1,65	2,04	1,33	1,76	2,18	1,59	2,14	2,67	1,69	2,30	2,90	1,94	2,73	3,18	2,07	2,98	3,49
Water flow rate system side	l/h	112	144	172	112	144	172	153	221	275	182	267	334	288	374	456	350	460	560	379	503	619	414	552	694	460	634	731	501	711	824
Pressure drop system side	kPa	4,0	6,0	8,0	4,0	6,0	8,0	6,0	12,0	18,0	8,0	17,0	25,0	8,0	13,0	18,0	11,0	18,0	25,0	10,0	16,0	24,0	9,0	15,0	22,0	13,0	22,0	29,0	12,0	22,0	28,0
Fan																															
Type	type																														
Fan motor	type																														
Number	no.	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
Air flow rate	m³/h	110	160	200	110	160	200	140	220	290	140	220	290	260	350	450	260	350	450	330	460	600	330	460	600	400	600	720	400	600	720
Input power	W	19	29	35	19	29	35	25	29	33	25	29	33	25	33	44	25	33	44	30	43	57	30	43	57	38	52	76	38	52	76
Electrical wiring	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	
Fan coil sound data (4)																															
Sound power level	dB(A)	31,0	38,0	45,0	31,0	38,0	45,0	35,0	46,0	51,0	35,0	46,0	51,0	34,0	41,0	48,0	34,0	41,0	48,0	37,0	44,0	51,0	37,0	44,0	51,0	42,0	51,0	56,0	42,0	51,0	56,0
Sound pressure	dB(A)	23,0	30,0	37,0	23,0	30,0	37,0	27,0	38,0	43,0	27,0	38,0	43,0	26,0	33,0	40,0	26,0	33,0	40,0	29,0	36,0	43,0	29,0	36,0	43,0	34,0	43,0	48,0	34,0	43,0	48,0
Water coil																															
Water content main coil	I	0,4		0,5		0,5		0,7		0,8		1,0		1,0		1,0		1,0		1,4		1,4		1,4		1,4		1,4		1,4	
Diametre hydraulic fittings																															
Main coil	Ø	1/2"		1/2"		1/2"		1/2"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"		3/4"	
		FCZ600P		FCZ650P		FCZ700P		FCZ750P		FCZ800P		FCZ850P		FCZ900P		FCZ950P		FCZ1000P													
		1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
		L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
Heating performance 70 °C / 60 °C (1)																															
Heating capacity	kW	6,50	8,10	10,00	7,19	9,15	11,50	8,10	9,80	11,00	9,10	11,30	12,50	9,80	10,80	12,00	11,30	12,35	14,00	10,77	13,35	15,14	11,20	14,42	17,10	12,53	15,24	17,02			
Water flow rate system side	l/h	570	710	877	631	802	1008	710	860	964	798	991	1096	859	947	1052	991	1083	1227	945	1171	1328	982	1264	1500	1101	1337	1493			
Pressure drop system side	kPa	12,0	18,0	26,0	14,0	21,0	31,0	17,0	24,0	29,0	10,0	15,0	18,0	22,0	27,0	32,0	17,0	20,0	25,0	12,0	17,0	22,0	16,0	24,0	33,0	22,0	32,0	38,0			
Heating performance 45 °C / 40 °C (2)																															
Heating capacity	kW	3,32	4,03	4,97	3,57	4,55	5,72	4,03	4,87	5,47	4,52	5,62	6,21	4,87	5,37	5,97	5,62	6,14	6,96	5,35	6,64	7,53	5,57	7,17	8,50	6,24	7,58	8,46			
Water flow rate system side	l/h	561	699	863	621	790	993	699	846	950	786	975	1079	846	932	1036	975	1066	1209	930	1152	1307	967	1245	1476	1084	1316	1469			
Pressure drop system side	kPa	12,0	18,0	26,0	14,0	20,0	31,0	16,0	24,0	29,0	10,0	14,0	18,0	20,0	26,0	30,0	14,0	20,0	23,0	10,0	12,0	22,0	15,0	24,0	33,0						

4-pipe

	FCZ101P			FCZ201P			FCZ301P			FCZ401P			FCZ501P			FCZ601P			FCZ701P			FCZ801P			FCZ901P			FCZ1001P			
	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	
	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	
Heating performance 65 °C / 55 °C (1)																															
Heating capacity	kW	0,75	1,01	1,17	1,02	1,35	1,60	1,80	2,18	2,56	2,21	2,65	3,12	2,59	3,34	3,73	2,96	3,67	4,36	3,66	4,29	4,94	4,20	4,79	5,35	4,73	5,63	5,72	4,85	5,56	6,08
Water flow rate system side	l/h	65	89	102	89	118	140	158	191	224	186	232	273	227	293	327	259	321	381	320	375	437	368	419	467	414	492	501	424	487	532
Pressure drop system side	kPa	2,0	4,0	4,0	4,0	8,0	10,0	16,0	23,0	30,0	4,0	6,0	8,0	6,0	8,0	10,0	8,0	12,0	16,0	11,0	14,0	18,0	16,0	20,0	24,0	8,0	12,0	12,0	10,0	14,0	16,0
Cooling performance 7 °C / 12 °C (2)																															
Cooling capacity	kW	0,65	0,84	1,00	0,89	1,28	1,60	1,68	2,17	2,65	2,20	2,92	3,60	2,68	3,69	4,25	3,22	3,90	4,65	3,92	4,89	5,50	4,84	5,66	6,10	4,29	5,00	6,91	5,69	6,88	7,62
Sensible cooling capacity	kW	0,51	0,69	0,83	0,71	1,05	1,33	1,26	1,65	2,04	1,59	2,14	2,67	1,94	2,73	3,18	2,56	3,17	3,92	2,99	3,76	4,30	3,72	4,42	4,83	2,97	3,78	5,68	4,42	5,34	5,53
Water flow rate system side	l/h	112	144	172	153	221	275	288	374	456	379	503	619	460	634	731	554	671	800	675	841	946	833	974	1049	738	860	1189	979	1183	1311
Pressure drop system side	kPa	4,0	6,0	8,0	6,0	12,0	18,0	8,0	13,0	18,0	10,0	16,0	24,0	13,0	22,0	29,0	14,0	19,0	26,0	16,0	24,0	30,0	20,0	26,0	30,0	10,0	12,0	22,0	22,0	31,0	36,0
Fan																															
Type	type																														
Fan motor	type																														
Number	no.	1	1	1	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3		
Air flow rate	m ³ /h	110	160	200	140	220	290	260	350	450	330	460	600	400	600	720	520	720	920	700	930	1140	900	1120	1300	700	930	1140	900	1120	1300
Input power	W	19	29	35	25	29	33	25	33	44	30	43	57	38	52	76	38	60	91	59	80	106	80	100	131	59	80	106	80	100	131
Electrical wiring	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3	
Fan coil sound data (3)																															
Sound power level	dB(A)	31,0	38,0	45,0	35,0	46,0	51,0	34,0	41,0	48,0	37,0	44,0	51,0	42,0	51,0	56,0	42,0	51,0	57,0	50,0	57,0	62,0	56,0	61,0	66,0	51,0	57,0	62,0	56,0	61,0	66,0
Sound pressure	dB(A)	23,0	30,0	37,0	27,0	38,0	43,0	26,0	33,0	40,0	29,0	36,0	43,0	34,0	43,0	48,0	34,0	43,0	49,0	42,0	49,0	54,0	48,0	53,0	58,0	43,0	49,0	54,0	48,0	53,0	58,0
Diametre hydraulic fittings																															
Main coil	Ø	1/2"	1/2"	1/2"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"		
Secondary coil	Ø																														

(1) Room air temperature 20°C d.b.; Water (in/out) 65 °C/55 °C; EUROVENT

(2) Room air temperature 27°C d.b./19°C w.b.; Water (in/out) 7 °C/12 °C; EUROVENT

(3) Aermec determines the sound power value on the basis of measurements taken in accordance with standard UNI EN 16583:15, respecting the Eurovent certification.

4-pipe


	FCZ201PO			FCZ301PO			FCZ401PO			FCZ501PO			FCZ601PO			FCZ701PO			FCZ901PO			
	2	4	6	1	4	6	1	3	6	1	5	6	1	4	7	2	5	7	2	5	7	
	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	
Heating performance 65 °C / 55 °C (1)																						
Heating capacity	kW	1,06	1,37	1,48	1,82	2,39	2,55	2,19	2,75	2,99	2,59	3,30	3,34	3,13	3,85	4,35	4,13	4,40	4,60	5,16	5,71	5,77
Water flow rate system side	l/h	93	120	130	159	210	223	192	240	262	226	290	301	274	336	381	361	385	403	452	500	504
Pressure drop system side	kPa	5,0	8,0	9,0	8,0	12,0	14,0	5,0	7,0	8,0	6,0	9,0	9,0	9,0	13,0	16,0	16,0	15,0	17,0	10,0	12,0	12,0
Cooling performance 7 °C / 12 °C (2)																						
Cooling capacity	kW	0,93	1,30	1,44	1,70	2,40	2,63	2,29	3,06	3,41	2,68	3,65	3,82	3,37	4,08	4,65	4,24	4,97	5,18	4,38	5,33	5,95
Sensible cooling capacity	kW	0,74	1,14	1,18	1,27	1,86	2,03	1,66	2,24	2,52	1,94	2,70	2,83	2,70	3,34	3,92	3,24	3,83	4,02	3,11	4,11	4,73
Water flow rate system side	l/h	160	224	248	292	413	452	394	526	586	461	628	657	580	702	800	729	855	28	753	917	1023
Pressure drop system side	kPa	8,0	13,0	15,0	8,0	16,0	18,0	11,0	18,0	22,0	13,0	22,0	24,0	15,0	21,0	26,0	20,0	26,0	28,0	10,0	14,0	17,0
Fan																						
Type	type										Centrifugal											
Fan motor	type										Asynchronous											
Number	no.	1	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
Air flow rate	m ³ /h	148	226	254	263	404	446	346	487	559	400	592	627	567	770	920	785	978	1050	785	978	1050
High static pressure	Pa	21	50	63	21	50	61	25	50	66	22	50	56	27	50	71	32	50	58	32	50	58
Input power	W	28	41	74	38	55	78	53	63	102	49	80	627	66	89	118	92	117	138	92	117	138
Electrical wiring	V2	V4	V6	V1	V4	V6	V1	V3	V6	V1	V5	V6	V1	V4	V7	V2	V5	V7	V2	V5	V7	
Duct type fan coil sound data (3)																						
Sound power level (inlet + radiated)	dB(A)	41,0	56,0	59,0	39,0	51,0	54,0	44,0	54,0	55,0	45,0	55,0	57,0	46,0	56,0	61,0	54,0	60,0	62,0	54,0	60,0	62,0
Sound power level (outlet)	dB(A)	37,0	52,0	55,0	35,0	47,0	49,0	40,0	50,0	52,0	41,0	51,0	53,0	44,0	54,0	60,0	52,0	59,0	61,0	52,0	59,0	61,0
Water coil																						
Water content main coil	l	0,5	0,8	1,0	1,0	1,2	1,2	1,8														
Water content the secondary coil	l	0,2	0,3	0,3	0,3	0,4	0,4	0,7														
Diametre hydraulic fittings																						
Main coil	Ø	1/2"			3/4"			3/4"			3/4"			3/4"			3/4"			3/4"		
Secondary coil	Ø										1/2"											

(1) Room air temperature 20°C d.b.; Water (in/out) 65 °C/55 °C; EUROVENT

(2) Room air temperature 27°C d.b./19°C w.b.; Water (in/out) 7 °C/12 °C; EUROVENT

(3) Aermec determines the sound power value on the basis of measurements taken in accordance with standard UNI EN 16583:15, respecting the Eurovent certification.

DIMENSIONS

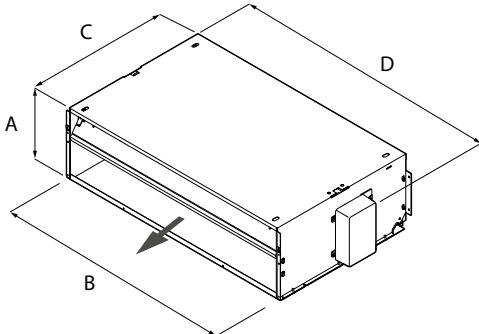

	FCZ100P	FCZ150P	FCZ200P	FCZ250P	FCZ300P	FCZ350P	FCZ400P	FCZ450P	FCZ500P	FCZ550P
Dimensions and weights	FCZ600P	FCZ650P	FCZ700P	FCZ750P	FCZ800P	FCZ850P	FCZ900P	FCZ950P	FCZ1000P	
A mm	216	216	216	216	216	216	216	216	216	216
B mm	412	412	522	522	753	753	973	973	973	973
C mm	453	453	453	453	453	453	453	453	453	453
D mm	452	452	562	562	793	793	1013	1013	1013	1013
Net weight kg	12	13	12	14	14	16	20	22	23	24
Dimensions and weights	FCZ101P	FCZ102P	FCZ201P	FCZ202P	FCZ301P	FCZ302P	FCZ401P	FCZ402P	FCZ501P	FCZ502P
A mm	216	216	216	216	216	216	216	216	216	216
B mm	412	412	522	522	753	753	973	973	973	973
C mm	453	453	453	453	453	453	453	453	453	453
D mm	452	452	562	562	793	793	1013	1013	1013	1013
Net weight kg	12	13	13	14	15	16	21	22	23	24
Dimensions and weights	FCZ601P	FCZ602P	FCZ701P	FCZ702P	FCZ801P	FCZ802P	FCZ901P	FCZ1001P		
A mm	216	216	216	216	216	216	216	216	216	216
B mm	1122	1122	1122	1122	1122	1122	1122	1122	1122	1122
C mm	453	453	453	453	453	453	453	453	453	453
D mm	1147	1147	1147	1147	1147	1147	1147	1147	1147	1147
Net weight kg	30	31	30	31	31	30	31	32	32	32

Aermec reserves the right to make any modifications deemed necessary.
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com