



NEW

Sileo V2 100
Sileo V2 125

Use

- Two-speed low-noise and energy-saving fan with stylish design for new enhanced comfort in bathrooms.

Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Health care facilities
- Child care facilities

Options

Pull-cord switch

Pull-cord switch

Timer

- Turn-off delay timer adjustable from 2 to 30 min.
- Turn-on delay timer. Fixed turn-on delay time of 60 sec.

Humidity sensor

Intelligent humidity control

- Humidity setpoint adjustable from 60 % up to 90 %.
- Turn-off delay adjustable from 2 up to 30 min.
- Fixed turn-on delay time of 60 sec.

Interval Timer


Interval operation mode (auto start)

- The fan can be put in adjustable time intervals (6 hrs, 12 hrs, 24 hrs) into operation automatically.
- The turn-on time in the interval operation corresponds to the adjusted turn-off delay time (from 2 to 30 min).


Features

- Specially designed mixed-flow impeller profile ensures high air capacity and low noise level.
- Casing and impeller are made of quality durable UV-resistant plastic.
- Backdraft damper for back flow prevention.
- The high ingress protection rating of IP 45 makes the fan the ideal solution for the ventilation of bathrooms and shower rooms.
- Sileo V2 has low power consumption.
- The motor is mounted on special anti-vibration dampers.
- The exhaust pipe incorporates a specially designed air rectifier to reduce the air turbulence, increase pressure and lower the noise level.
- Ideal for intermittent or continuous ventilation.

| Model | Pull-cord switch | Interval Timer | Timer | | Humidity sensor |
|--------------|------------------|----------------|----------------|---------------|-----------------|
| | | | Turn-off delay | Turn-on delay | |
| Sileo V2 100 | | | | | |
| 100S | ● | | | | |
| 100T | | ○ | ● | ● | |
| 100H | | | ● | ● | ● |
| Sileo V2 125 | | | | | |
| 125S | ● | | | | |
| 125T | | ○ | ● | ● | |
| 125H | | | ● | ● | ● |

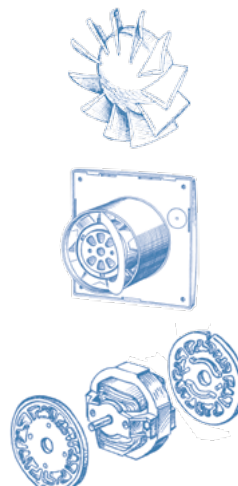

Overall and mounting dimensions

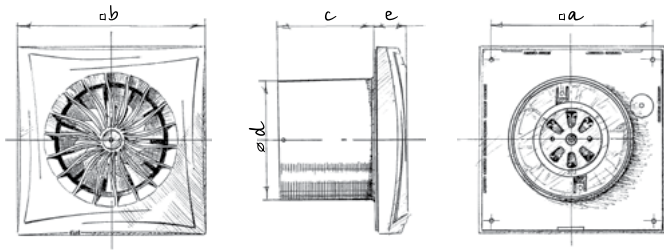

| Model | Dimensions [mm] | | | | |
|--------------|-----------------|-----|----|-----|----|
| | a | b | c | d | e |
| Sileo V2 100 | 136 | 158 | 81 | 100 | 26 |
| Sileo V2 125 | 158 | 182 | 91 | 124 | 27 |

Technical data

| Parameters | Sileo V2 100 | | Sileo V2 125 | |
|-------------------------------------|--------------|-------|--------------|------|
| | min. | max. | min. | max. |
| Voltage [V] | 220-240 | | 220-240 | |
| Power [W] | 4.5 | 7 | 9.5 | 13.5 |
| Current [A] | 0.029 | 0.052 | 0.065 | 0.09 |
| RPM | 1850 | 2400 | 1800 | 2250 |
| Air capacity [m ³ /h] | 60 | 90 | 145 | 170 |
| Sound pressure level at 3 m [dB(A)] | 22 | 25 | 28 | 32 |

