



# Ceiling swirl diffusers


## Type AIRNAMIC




Horizontal omni directional air discharge



Square diffuser face



Gently sloped, flat border (shown in a continuous ceiling)



Three-dimensionally profiled blades



### For the most demanding requirements of technical function, comfort, and design

Circular and square ceiling swirl diffusers with fixed air control blades, for high volume flow rates at low sound power levels and low differential pressure due to innovative polymer technology

- Nominal sizes 300, 400, 600, 625
- Volume flow rate range 13 – 385 l/s or 47 – 1386 m<sup>3</sup>/h
- Plastic diffuser face with overlapping, three-dimensionally profiled blades, for the most efficient swirl and high induction
- For supply and extract air
- For variable and constant volume flows
- For all types of ceiling systems, and with an extended border also suitable for freely suspended installation
- Diffuser face with gently sloped, flat border – only 3 mm high
- Plenum box with acoustically optimised and lockable damper blade
- Ideal for comfort zones

#### Optional equipment and accessories

- Exposed diffuser face available in RAL CLASSIC colours

| Type     |                                    | Page     |
|----------|------------------------------------|----------|
| AIRNAMIC | General information                | AIR – 2  |
|          | Function                           | AIR – 3  |
|          | Technical data                     | AIR – 5  |
|          | Quick sizing                       | AIR – 6  |
|          | Specification text                 | AIR – 7  |
|          | Order code                         | AIR – 8  |
|          | Variants                           | AIR – 9  |
|          | Dimensions and weight              | AIR – 10 |
|          | Product details                    | AIR – 11 |
|          | Installation examples              | AIR – 12 |
|          | Installation details               | AIR – 13 |
|          | Commissioning                      | AIR – 16 |
|          | Basic information and nomenclature | AIR – 17 |

## Application

### Application

- Type AIRNAMIC ceiling swirl diffusers are used as supply air or extract air diffusers for comfort zones
- Attractive design element for building owners and architects with demanding aesthetic requirements
- Horizontal swirling supply air discharge for mixed flow ventilation
- The efficient swirl creates high induction levels, thereby rapidly reducing the temperature difference and airflow velocity (supply air variant)
- For variable and constant volume flows
- For supply air to room air temperature differences from –12 to +10 K
- For room heights up to 4 m (lower edge of suspended ceiling)
- For all types of ceiling systems

- With an extended border also suitable for freely suspended installation (supply air variant)

### Special characteristics

- Plastic diffuser face with overlapping, three-dimensionally profiled blades, for the most efficient swirl and high induction
- For all types of ceiling systems, and with an extended border also suitable for freely suspended installation
- Diffuser face with gently sloped, flat border – only 3 mm high
- Plenum box for supply air, with an optimised equalising element that ensures a uniform airflow through the diffuser face

### Nominal sizes

- Q: 300L, 300H, 600, 625
- R: 400L, 400H, 600

## Description

### Variants

- AIRNAMIC-Q: Square diffuser face
- AIRNAMIC-R: Circular diffuser face
- AIRNAMIC-\*-Z: Supply air
- AIRNAMIC-\*-A: Extract air

### Connection

- Horizontal duct connection

### Parts and characteristics

- Square or circular diffuser face, made of plastic, with three-dimensionally profiled blades
- Damper blade for volume flow rate balancing, can be set in 15° intervals between 0 and 90°
- Spigot with double lip seal
- Simple installation of the diffuser face due to central fixing screw with decorative cap

### Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with double lip seal

### Materials and surfaces

- Diffuser face, spigot and damper blade made of ABS plastic, UL 94, V-0, flame retardant
- Plenum box and cross bar made of galvanised sheet steel
- X: Plenum box made of plastic and galvanised sheet steel
- Equalising element made of synthetic fibre
- Double lip seal made of rubber
- Diffuser face coated RAL 9010, pure white
- P1: Coated, RAL CLASSIC colour

### Standards and guidelines

- Sound power level of the air-regenerated noise measured according to EN ISO 5135

### Maintenance

- Maintenance-free as construction and materials are not subject to wear
- Inspection and cleaning to VDI 6022

## Functional description


Ceiling swirl diffusers in air conditioning systems create a swirl to supply air to rooms. The resulting airflow induces high levels of room air, thereby rapidly reducing the airflow velocity and the temperature difference between supply air and room air. Ceiling swirl diffusers allow for large volume flow rates. The result is a mixed flow ventilation in comfort zones, with good overall room ventilation, creating only very little turbulence in the occupied zone.

Type AIRNAMIC ceiling swirl diffusers have fixed blades with three-dimensionally profiled contours. This allows for high volume flow rates and low sound power levels. The supply air to room air temperature difference may range from  $-12$  to  $+10$  K.


A damper blade simplifies volume flow rate balancing for commissioning.

To give rooms an aesthetic, uniform look, Type AIRNAMIC diffusers may also be used for extract air. There is then no equalising element.

## Schematic illustration of the AIRNAMIC, with plenum box for horizontal duct connection

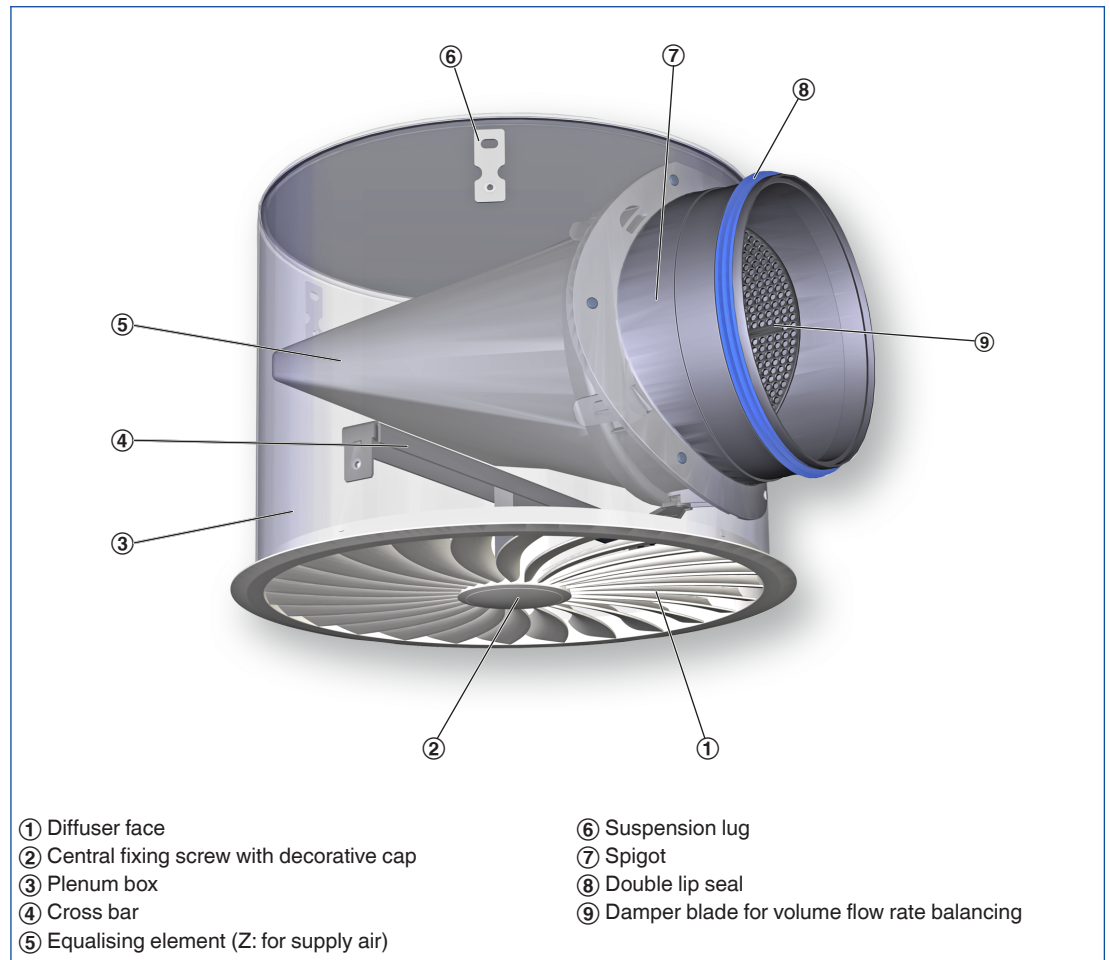

Horizontal omni directional air discharge

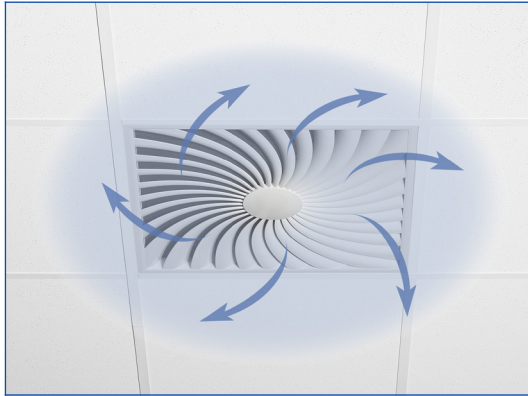

|  |  |
|--|--|
| Nominal sizes  | 300, 400, 600, 625 mm                        |
| Minimum volume flow rate, with $\Delta t_z = -6$ K     | 13 – 76 l/s or 47 – 274 m <sup>3</sup> /h    |
| Maximum volume flow rate, with $L_{WA} \cong 50$ dB(A) | 95 – 385 l/s or 342 – 1386 m <sup>3</sup> /h |
| Supply air to room air temperature difference          | -12 to +10 K                                 |

This specification text describes the general properties of the product. Texts for variants can be generated with our Easy Product Finder design programme.

Ceiling swirl diffusers with square or circular diffuser face, for comfort zones with particularly demanding requirements of aesthetics and design. Supply air and extract air variants. Excellent aerodynamic and acoustic function due to air control blades with optimised aerofoil contours, for horizontal swirling air discharge, creating high levels of induction. For installation into all types of suspended ceilings.

Ready-to-install component which consists of the diffuser face and a plenum box, equalising element (only supply air variants), side entry spigot, cross bar, and suspension holes or suspension lugs.

The diffuser face is fixed to the cross bar with a central screw, concealed by a decorative cap. Spigot suitable for ducts to EN 1506 or EN 13180. Sound power level of the air-regenerated noise measured according to EN ISO 5135.

#### Special characteristics

- Plastic diffuser face with overlapping, three-dimensionally profiled blades, for the most efficient swirl and high induction
- For all types of ceiling systems, and with an extended border also suitable for freely suspended installation
- Diffuser face with gently sloped, flat border – only 3 mm high
- Plenum box for supply air, with an optimised equalising element that ensures a uniform

airflow through the diffuser face

#### Materials and surfaces

- Diffuser face, spigot and damper blade made of ABS plastic, UL 94, V-0, flame retardant
- Plenum box and cross bar made of galvanised sheet steel
- X: Plenum box made of plastic and galvanised sheet steel
- Equalising element made of synthetic fibre
- Double lip seal made of rubber
- Diffuser face coated RAL 9010, pure white
- P1: Coated, RAL CLASSIC colour

#### Technical data

- Nominal sizes: 300, 400, 600, 625 mm
- Minimum volume flow rate, with  $\Delta t_z = -6$  K: 13 – 76 l/s or 47 – 274 m<sup>3</sup>/h
- Maximum volume flow rate, with  $L_{WA} \cong 50$  dB(A): 95 – 385 l/s or 342 – 1386 m<sup>3</sup>/h
- Supply air to room air temperature difference: -12 to +10 K


#### Sizing data

- $\dot{V}$  \_\_\_\_\_  
[m<sup>3</sup>/h]
- $\Delta p_t$  \_\_\_\_\_  
[Pa]

Air-regenerated noise

- $L_{WA}$  \_\_\_\_\_  
[dB(A)]

AIRNAMIC-Q/600

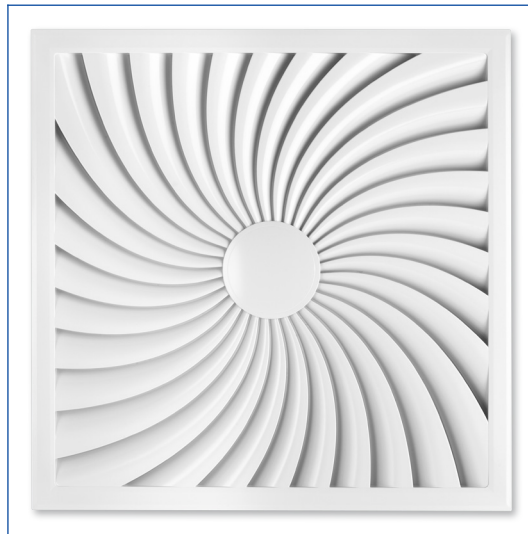

**AIRNAMIC-Q**

**Variant**

- Ceiling swirl diffuser with square diffuser face
- With plenum box for horizontal duct connection


**Nominal sizes**

- 300L, 300H, 600, 625

**Parts and characteristics**

- Square diffuser face
- Plenum box for horizontal duct connection
- Square opening to accommodate the diffuser face

AIRNAMIC-R/600

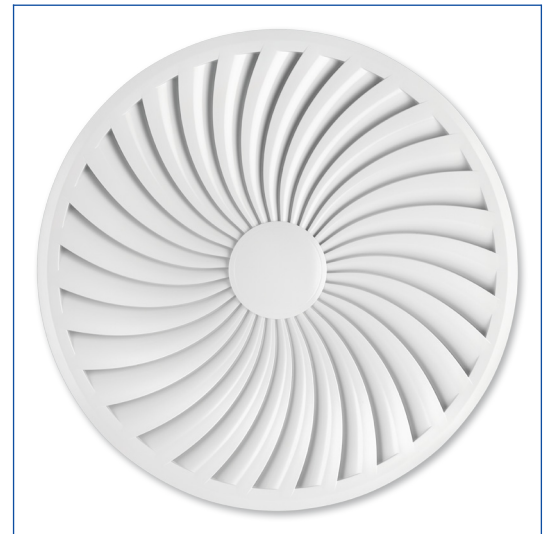

- Optimised equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Damper blade for volume flow rate balancing, can be set in 15° intervals between 0 and 90°
- Spigot with double lip seal
- Simple installation of the diffuser face due to central fixing screw with decorative cap

**Construction features**

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with double lip seal

**AIRNAMIC-R**

**Variant**

- Ceiling swirl diffuser with circular diffuser face
- With plenum box for horizontal duct connection

**Nominal sizes**

- 400L, 400H, 600

**Parts and characteristics**


- Circular diffuser face
- Plenum box for horizontal duct connection
- Circular opening to accommodate the diffuser face

- Optimised equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Damper blade for volume flow rate balancing, can be set in 15° intervals between 0 and 90°
- Spigot with double lip seal
- Simple installation of the diffuser face due to central fixing screw with decorative cap

**Construction features**

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with double lip seal

Square diffuser face with plenum box for horizontal duct connection

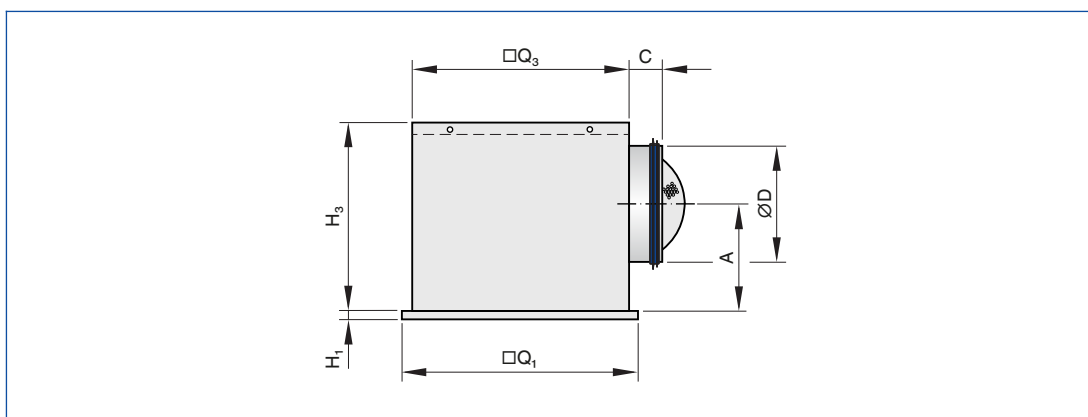


AIRNAMIC-Q

| Nominal size | □Q <sub>1</sub> | H <sub>1</sub> | □Q <sub>3</sub> | H <sub>3</sub> | ØD  | A   | C  | Plenum box     | m   |
|--------------|-----------------|----------------|-----------------|----------------|-----|-----|----|----------------|-----|
|              | mm              | mm             | mm              | mm             | mm  | mm  | mm |                | kg  |
| Q/300L       | 298             | 3              | 290             | 250            | 158 | 139 | 60 | AK-H-Q/<br>300 | 3.0 |
| Q/300H       | 298             | 3              | 290             | 250            | 158 | 139 | 60 | AK-H-Q/<br>300 | 3.0 |
| Q/600        | 598             | 3              | 567             | 345            | 248 | 194 | 60 | AK-H-Q/<br>600 | 8.7 |
| Q/625        | 623             | 3              | 567             | 345            | 248 | 194 | 60 | AK-H-Q/<br>600 | 8.7 |

Weights apply to the supply air variant

AIRNAMIC-R with plenum box for horizontal duct connection

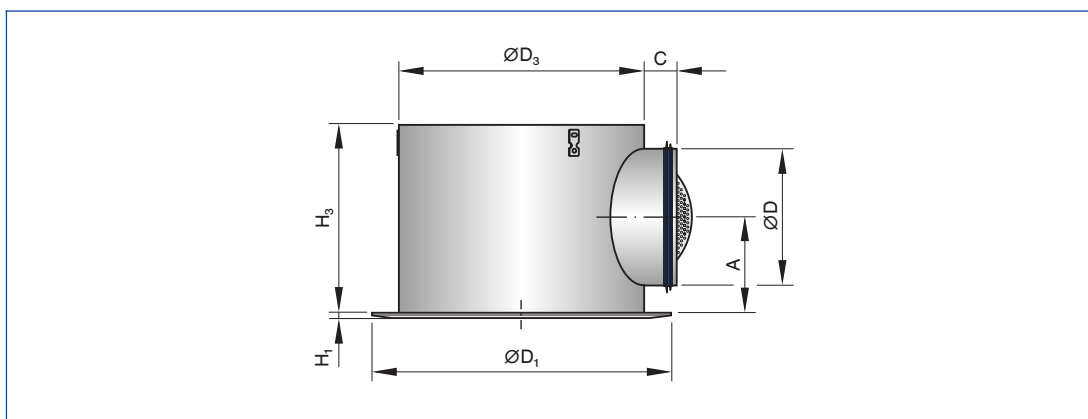

AIRNAMIC-R


| Nominal size | ØD <sub>1</sub> | H <sub>1</sub> | ØD <sub>3</sub> | H <sub>3</sub> | ØD  | A   | C  | Plenum box     | m   |
|--------------|-----------------|----------------|-----------------|----------------|-----|-----|----|----------------|-----|
|              | mm              | mm             | mm              | mm             | mm  | mm  | mm |                | kg  |
| R/400L       | 400             | 3              | 364             | 280            | 198 | 151 | 60 | AK-H-R/<br>400 | 4.0 |
| R/400H       | 400             | 3              | 364             | 280            | 198 | 151 | 60 | AK-H-R/<br>400 | 4.0 |
| R/600        | 600             | 3              | 575             | 345            | 248 | 194 | 60 | AK-H-R/<br>600 | 7.5 |

Weights apply to the supply air variant

**Innovation**

Type AIRNAMIC swirl diffusers meet the most demanding requirements of technical function, comfort, and design. The unique design of the air control blades, a specially developed equalising element, and the innovative plenum box result in high volume flow rates, a low sound power level and low differential pressure. The air control blades have three-dimensionally profiled contours to create an efficient swirl. As a consequence, the air velocities and temperature differences in the occupied zone are very low, and the level of comfort is excellent. The production of these unusually contoured blades is only possible by the use of high-quality plastics and by applying innovative production technology. The exceptionally aesthetic air control blades allow for perfect architectural integration of the circular or square swirl diffuser and therefore make for an important design element for building owners and architects. A spigot with double lip seal provides a low-leakage connection of the plenum box to the ducting, and a lockable damper blade for volume flow rate balancing simplifies commissioning.


**Diffuser face AIRNAMIC-Q**

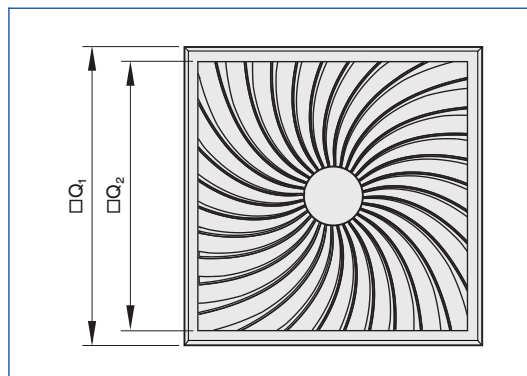

**AIRNAMIC-Q**

| Nominal size | □Q <sub>1</sub> | □Q <sub>2</sub> | A <sub>eff</sub> |
|--------------|-----------------|-----------------|------------------|
|              | mm              | mm              | m <sup>2</sup>   |
| Q/300L       | 298             | 262             | 0.0139           |
| Q/300H       | 298             | 262             | 0.0175           |
| Q/600        | 598             | 539             | 0.0616           |
| Q/625        | 623             | 539             | 0.0616           |

**Diffuser face AIRNAMIC-R**

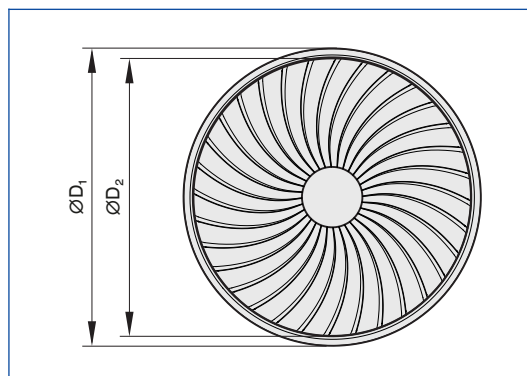


**AIRNAMIC-R**

| Nominal size | ØD <sub>1</sub> | ØD <sub>2</sub> | A <sub>eff</sub> |
|--------------|-----------------|-----------------|------------------|
|              | mm              | mm              | m <sup>2</sup>   |
| R/400L       | 400             | 352             | 0.0186           |
| R/400H       | 400             | 352             | 0.0258           |
| R/600        | 600             | 546             | 0.0504           |

Installation in T-bar ceilings



Installation in continuous ceilings

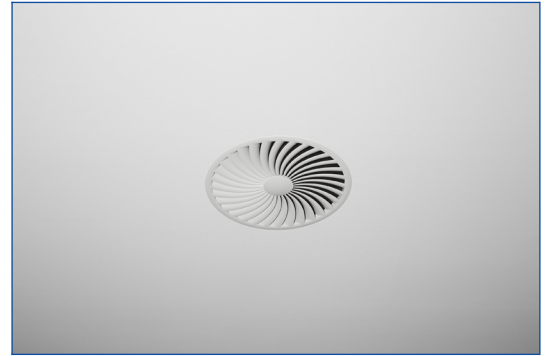


## Installation and commissioning

- Preferably for rooms with a clear height up to 4.0 m
- Flush ceiling installation
- Freely suspended installation only with an extended border (supply air variant)
- Horizontal duct connection
- If necessary, carry out volume flow rate balancing with the damper blade


These are only schematic diagrams to illustrate installation details.

## Flush ceiling installation with square plenum box

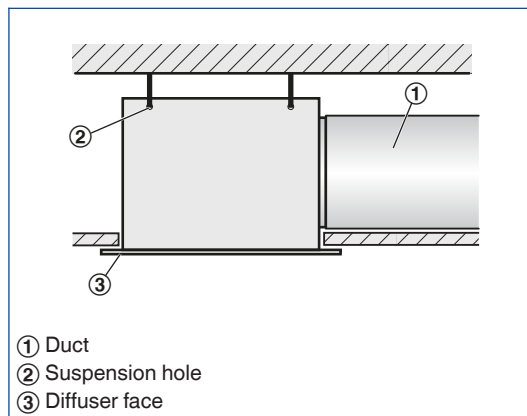


- Horizontal duct connection
- Four suspension holes
- Suspension with cords, wires or hangers, to be provided by others

## Flush ceiling installation with circular plenum box

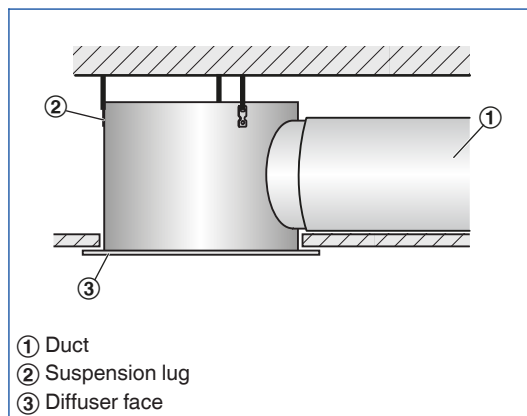


- Horizontal duct connection
- Three suspension lugs
- Suspension with cords, wires or hangers, to be provided by others

**Diffuser face – sealing**

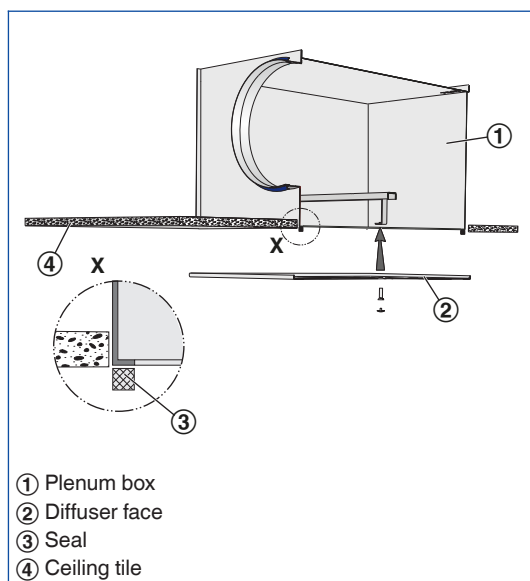

- The self-adhesive sealing tape (supplied) has to be applied to the return edges of the plenum box by others


**Diffuser face – central screw fixing**

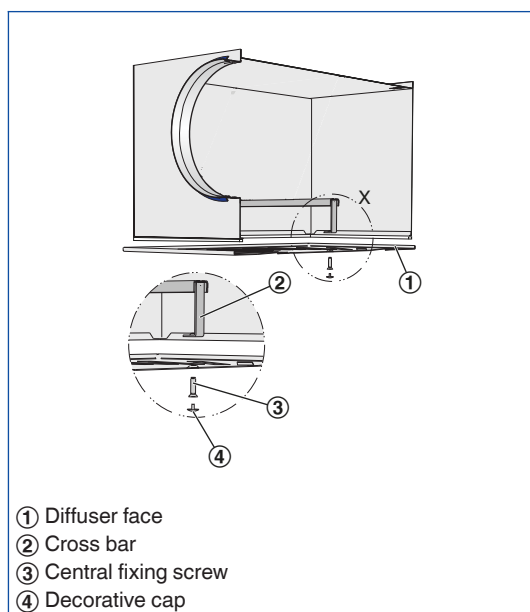

- Using the central fixing screw, fix the diffuser face to the cross bar of the plenum box
- Attach the decorative cap


## Ceiling systems

### Installation into grid ceilings

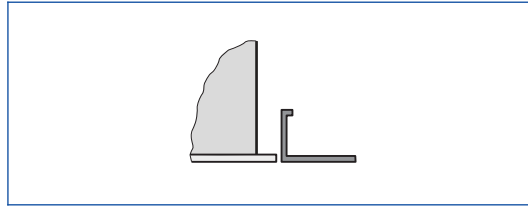


- Fix the plenum box to the ceiling
- The ceiling tile of the grid ceiling is independent of the ceiling diffuser
- Fix the diffuser face after the ceiling has been completed

### Installation in continuous ceilings

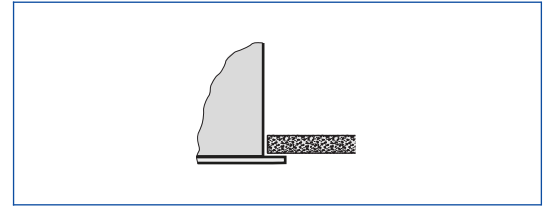

- Fix plenum box (including diffuser face, if necessary) to the ceiling
- Adjust plasterboard ceiling tile as required
- If necessary, fix the diffuser face after the ceiling has been completed

### Installation in T-bar ceilings

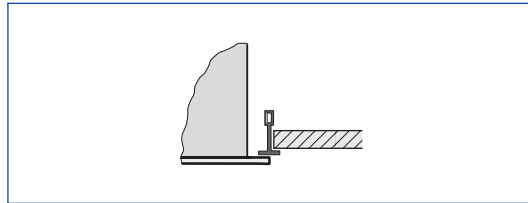


- Fix the plenum box to the ceiling
- The T-bar ceiling is independent of the ceiling diffuser
- Fix the diffuser face below the T-bars after the ceiling has been completed

## Volume flow rate balancing

When several diffusers are connected to just one volume flow controller, it may be necessary to balance the volume flow rates.


- The diffuser face can be removed to access the damper blade; the damper blade can then be set in 15° intervals between 0 and 90°

## AIRNAMIC, XARTO Volume flow rate balancing

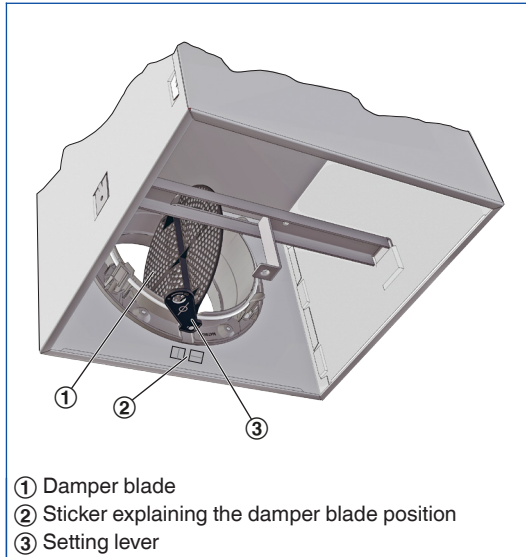

Open, 0°

## AIRNAMIC, XARTO Volume flow rate balancing

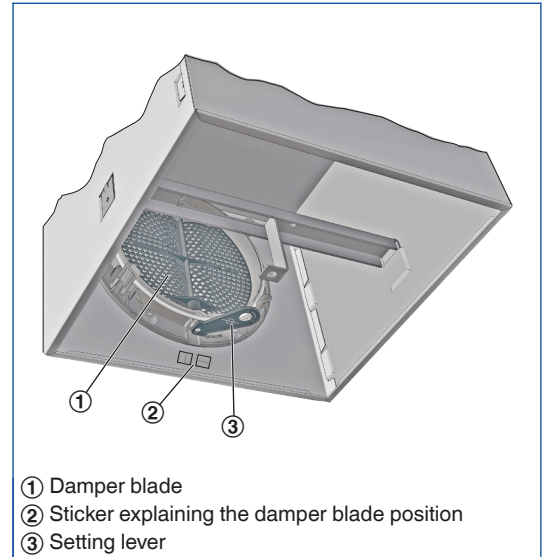

Closed, 90°